



STYLI FOR HEIGHT GAUGES


| Styli for height gauges | Order No. | Shaft | Ball | wt | dk mm | d1 mm | L mm | ML mm |
|-------------------------|-----------------|-------|------|------|-------|-------|------|-------|
| Styli (Type F) | 0.2-15.2-1 NTF | TC | Ruby | 0.2g | 0.2 | 0.15 | 15.2 | 1.5 |
| | 0.25-15.3-1 NTF | TC | Ruby | 0.2g | 0.25 | 0.2 | 15.3 | 2.5 |
| | 0.3-15.3-1 NTF | TC | Ruby | 0.2g | 0.3 | 0.2 | 15.3 | 2.5 |
| | 0.4-15.4-1 NTF | TC | Ruby | 0.2g | 0.4 | 0.3 | 15.4 | 2.5 |
| | 0.5-15.5-1 NTF | TC | Ruby | 0.2g | 0.5 | 0.3 | 15.5 | 2.5 |
| | 0.6-15.6-1 NTF | TC | Ruby | 0.3g | 0.6 | 0.4 | 15.6 | 4.5 |
| | 0.7-15.7-1 NTF | TC | Ruby | 0.3g | 0.7 | 0.4 | 15.7 | 4.5 |
| | 0.8-15.8-1 NTF | TC | Ruby | 0.3g | 0.8 | 0.6 | 15.8 | 4.5 |
| | 0.9-15.9-1 NTF | TC | Ruby | 0.3g | 0.9 | 0.6 | 15.9 | 4.5 |
| | 1.0-16.0-1 NTF | TC | Ruby | 0.4g | 1.0 | 0.8 | 16.0 | 4.5 |

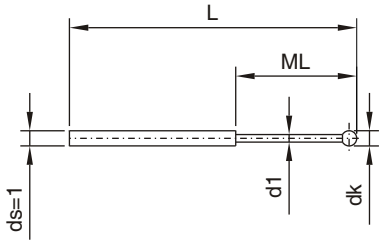

| Styli (Type N) | Order No. | Shaft | Ball | wt | dk mm | ds mm | L mm |
|-----------------------|-----------------|-------|-------|-------|-------|-------|-------|
| Styli (Type N) | 1.35-26.4-1 NTN | TC | Ruby | 0.3g | 1.35 | 1.0 | 26.4 |
| | 1.5-26.5-1 NTN | TC | Ruby | 0.3g | 1.5 | 1.0 | 26.5 |
| | 2.0-26-1 NTN | TC | Ruby | 0.3g | 2.0 | 1.0 | 26.0 |
| | 2.0-45-1 NTN | TC | Ruby | 0.5g | 2.0 | 1.0 | 45.0 |
| | 2.0-61-1 NTN | TC | Ruby | 0.7g | 2.0 | 1.0 | 61.0 |
| | 2.0-81-1 NTN | TC | Ruby | 1.0g | 2.0 | 1.0 | 81.0 |
| | 2.0-101-1 NTN | TC | Ruby | 1.3g | 2.0 | 1.0 | 101.0 |
| | 3.0-38-2 NTN | TC | Ruby | 2.0g | 3.0 | 2.0 | 38.0 |
| | 4.0-27-2 NTN | TC | Ruby | 1.3g | 4.0 | 2.0 | 27.0 |
| | 4.0-45-2 NTN | TC | Ruby | 2.1g | 4.0 | 2.0 | 45.0 |
| | 4.0-62-2 NTN | TC | Ruby | 2.9g | 4.0 | 2.0 | 62.0 |
| | 4.0-82-2 NTN | TC | Ruby | 3.9g | 4.0 | 2.0 | 82.0 |
| | 4.0-102-2 NTN | TC | Ruby | 4.9g | 4.0 | 2.0 | 102.0 |
| | 5.0-27.5-2 NTN | TC | Ruby | 1.4g | 5.0 | 2.0 | 27.5 |
| | 5.0-42.5-2 NTN | TC | Ruby | 2.3g | 5.0 | 2.0 | 45.0 |
| | 5.0-45-3 NTN | TC | Ruby | 6.0g | 5.0 | 3.0 | 45.0 |
| | 5.0-62.5-2 NTN | TC | Ruby | 3.1g | 5.0 | 2.0 | 62.5 |
| | 5.0-82.5-2 NTN | TC | Ruby | 4.0g | 5.0 | 2.0 | 82.5 |
| | 5.0-102.5-2 NTN | TC | Ruby | 5.0g | 5.0 | 2.0 | 102.5 |
| | 6.0-28-2 NTN | TC | Ruby | 1.6g | 6.0 | 2.0 | 28.0 |
| | 6.0-43-2 NTN | TC | Ruby | 2.2g | 6.0 | 2.0 | 43.0 |
| | 6.0-63-2 NTN | TC | Ruby | 3.2g | 6.0 | 2.0 | 63.0 |
| | 6.0-73-3 NTN | TC | Ruby | 7.5g | 6.0 | 3.0 | 73.0 |
| | 6.0-83-2 NTN | TC | Ruby | 4.2g | 6.0 | 2.0 | 83.0 |
| | 6.0-103-2 NTN | TC | Ruby | 4.9g | 6.0 | 2.0 | 103.0 |
| | 6.0-103-3 NTN | TC | Ruby | 10.5g | 6.0 | 3.0 | 103.0 |
| | 8.0-29-2 NTN | TC | Ruby | 2.0g | 8.0 | 2.0 | 29.0 |
| | 8.0-44-3 NTN | TC | Ruby | 6.5g | 8.0 | 3.0 | 44.0 |
| | 8.0-64-2 NTN | TC | Ruby | 3.6g | 8.0 | 2.0 | 64.0 |
| | 8.0-73-3 NTN | TC | Ruby | 7.5g | 6.0 | 3.0 | 73.0 |
| 8.0-84-2 NTN | TC | Ruby | 4.5g | 8.0 | 2.0 | 84.0 | |
| 8.0-103-3 NTN | TC | Ruby | 10.5g | 8.0 | 3.0 | 103.0 | |

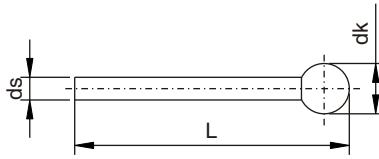

| T-Styli (Type H) | Order No. | Shaft | Ball | wt | dk mm | ds mm | MD mm | L mm |
|-------------------------|----------------|-------|------|-----|-------|-------|-------|-------|
| T-Styli (Type H) | 1.0-50-2 NTTH | TC | Ruby | 3g | 1.0 | 2.0 | 10.0 | 50.0 |
| | 1.0-100-2 NTTH | TC | Ruby | 5g | 1.0 | 2.0 | 10.0 | 100.0 |
| | 2.0-50-2 NTTH | TC | Ruby | 3g | 2.0 | 2.0 | 20.0 | 50.0 |
| | 2.0-100-2 NTTH | TC | Ruby | 5g | 2.0 | 2.0 | 20.0 | 100.0 |
| | 1.0-50-3 NTTH | TC | Ruby | 6g | 1.0 | 3.0 | 10.0 | 50.0 |
| | 1.0-100-3 NTTH | TC | Ruby | 10g | 1.0 | 3.0 | 10.0 | 100.0 |
| | 2.0-50-3 NTTH | TC | Ruby | 6g | 2.0 | 3.0 | 20.0 | 50.0 |
| | 2.0-100-3 NTTH | TC | Ruby | 10g | 2.0 | 3.0 | 20.0 | 100.0 |

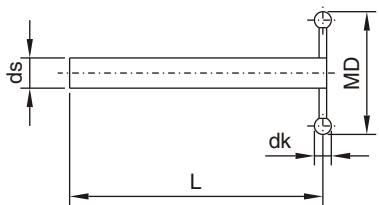

TC = Tungsten Carbide


INDO SERVICES

TEL : 080 23406723, Fax : 080 23111346, E-mail : info@indoservices.net

ADAPTORS FOR HEIGHT GAUGES

| |
|------------------------------------|
| Adaptors for height gauges |
| Adaptors for styli (Type H) |

| Order No. | Material | wt | ds mm |
|-----------|----------|----|----------|
| 1.0 NHH | Steel | 4g | 1.0 |
| 2.0 NHH | Steel | 4g | 2.0 |
| 3.0 NHH | Steel | 3g | 3.0 |




For use with **Styli (Type F)**, **(Type N)** and **T-Styli (Type H)** (Page 81).

Use only with **Shaft (Type A)** or **Shaft (Type B)** shown below.

| |
|------------------------------------|
| Adaptors for styli (Type S) |
|------------------------------------|

| Order No. | Material | wt |
|-----------|----------|----|
| 7.0 NHS | Steel | 5g |




For use with **M2 thread Styli**.

Use only with **Shaft (Type A)** or **Shaft (Type B)** shown below.

| |
|-----------------------|
| Shaft (Type A) |
|-----------------------|


| Order No. | Material | wt | Suitable for height gauge |
|------------|----------|-----|------------------------------------|
| 8.0-90 NSA | Steel | 24g | Trimos, Mitutoyo, Wenzel, Mahr, |

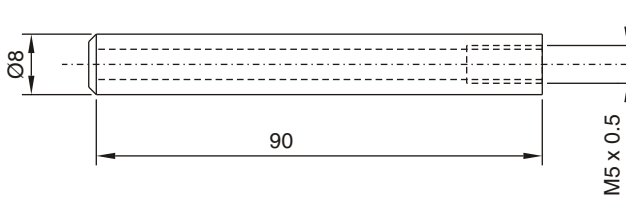

Use only with **Adaptors for styli (Type H)** or **Adaptors for styli (Type S)** shown above.

| |
|-----------------------|
| Shaft (Type B) |
|-----------------------|


| Order No. | Material | wt | Suitable for height gauge |
|------------|----------|-----|------------------------------|
| 6.0-63 NSB | Steel | 19g | Tesa |

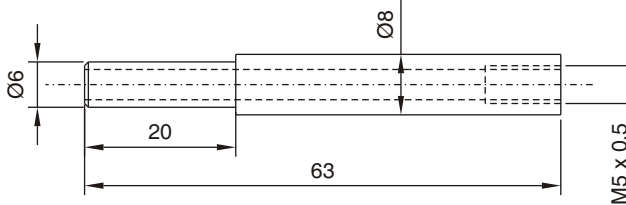

Use only with **Adaptors for styli (Type H)** or **Adaptors for styli (Type S)** shown above.


ADAPTORS FOR HEIGHT GAUGES

| | | | | |
|-----------------------------------|------------|----------|-----|---------------------------|
| Adaptors for height gauges | Order No. | Material | wt | Suitable for height gauge |
| Adaptor for styli (Type C) | 6.0-75 NHC | Steel | 20g | Tesa |

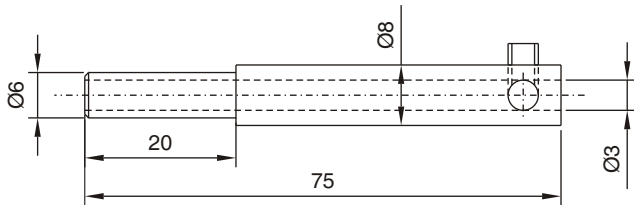


For use with **Styli (Type N), T-Styli (Type H)** with $ds = 3\text{mm}$ (Page 81).

| | | | | |
|-----------------------------------|-------------|----------|-----|---------------------------------|
| Adaptor for styli (Type D) | Order No. | Material | wt | Suitable for height gauge |
| | 8.0-100 NHD | Steel | 25g | Trimos, Mitutoyo, Wenzel, Mahr, |

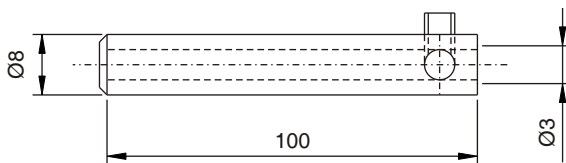


For use with **Styli (Type N), T-Styli (Type H)** with $ds = 3\text{mm}$ (Page 81).

| | | | | |
|-----------------------------------|------------|----------|-----|---------------------------|
| Adaptor for styli (Type E) | Order No. | Material | wt | Suitable for height gauge |
| | 6.0-75 NHE | Steel | 20g | Tesa |

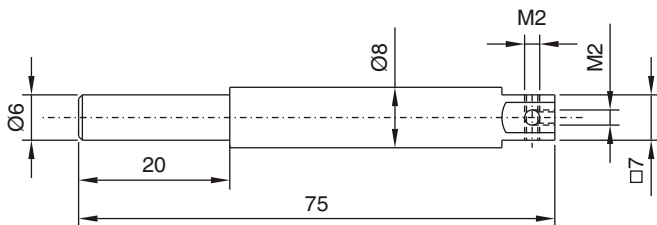

For use with **M2 thread Styli**.

| | | | | |
|-----------------------------------|-------------|----------|-----|---------------------------------|
| Adaptor for styli (Type F) | Order No. | Material | wt | Suitable for height gauge |
| | 8.0-100 NHF | Steel | 25g | Trimos, Mitutoyo, Wenzel, Mahr, |

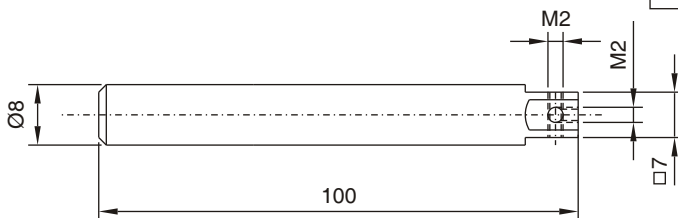

For use with **M2 thread Styli**.

INDO SERVICES

TEL : 080 23406723, Fax : 080 23111346, E-mail : info@indoservices.net